

DYNAMICA

Powerful, dynamic and technological: the central vacuum unit integrated with smart assistant devices by Tubò Device app.

TUBÒ THE VACUUM INTEGRATED SYSTEM

TUBÒ is the vacuum integrated solution that redefines the very concept of wellness to improve the indoor-air quality and the comfort of your living space.

By Aertecnica's experience and research result, la centrale **Dynamica managed via Tubò Device app, Google Assistant and Amazon Alexa** the integrated TUBÒ vacuum system.

Entirely Made in Italy, Dynamica is synthesis of technology, performance and design.



Aertecnica Device



EVERYTHING UNDER CONTROL

With Tubò Device app you can manage your Dynamica, Tubò Robò and Airò Breath.

At any time from anywhere, you can check the status of Dynamica.



MAIN FEATURES




APF System

Self-cleaning filter system

Aertecnica Patent IT1397753

An innovative and patented system that collects dust through vibration. It reduces maintenance work and keeps the central vacuum unit's suction capacity.

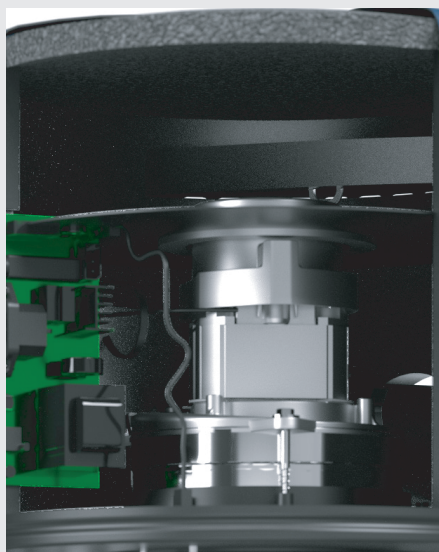

Long Life turbine engine

The Long Life three-stage by-pass motor is designed for professional use and guarantees the best vacuum performance of the market. It is ideal for all applications and optimized for retractable hose systems.






The reduced number of Rpm guarantees acoustic comfort and high number of work hours.



Multi-layer collection bag (optional)

The high capacity multilayer dust bag prevents contact with the dust during the maintenances. It is ideal for people with allergies.

COMPONENTS SUPPLIED

	CODE	DESCRIPTION	Q.TY
	CM991	Dynamica central power unit installation kit	1
	CM835	Silencer for air expulsion	1
	CM953	Dynamica central power unit connection kit	1
	PA918	Black Ø 32 Open service socket	1
	TR316	Automatic airway door	1

PRACTICAL AND EASY INSTALLATION.

Quick Mounting Wall support (1)

The front hooking requires less installation space and guarantees perfect stability.

The anti-vibration kit is designed to reduce significantly noise generated by any vibration.



Overhead air exhaust

The upward exhaustion of air is an innovation that allows to reduce the length of the ejection line e improves the performance of Dynamica, also optimizing the working temperature.

Double dust Inlet (right/left)

Ensures maximum flexibility and speed in the installation of the central vacuum unit. It allows to optimize the connection of the vacuum unit and therefore to improve the performance.


Onboard service vacuum inlet (2)

Allows easy direct connection to the unit.

The dust inlet can be placed in right or left side at your convenience.



UNDER CONTROL WITH THE APP

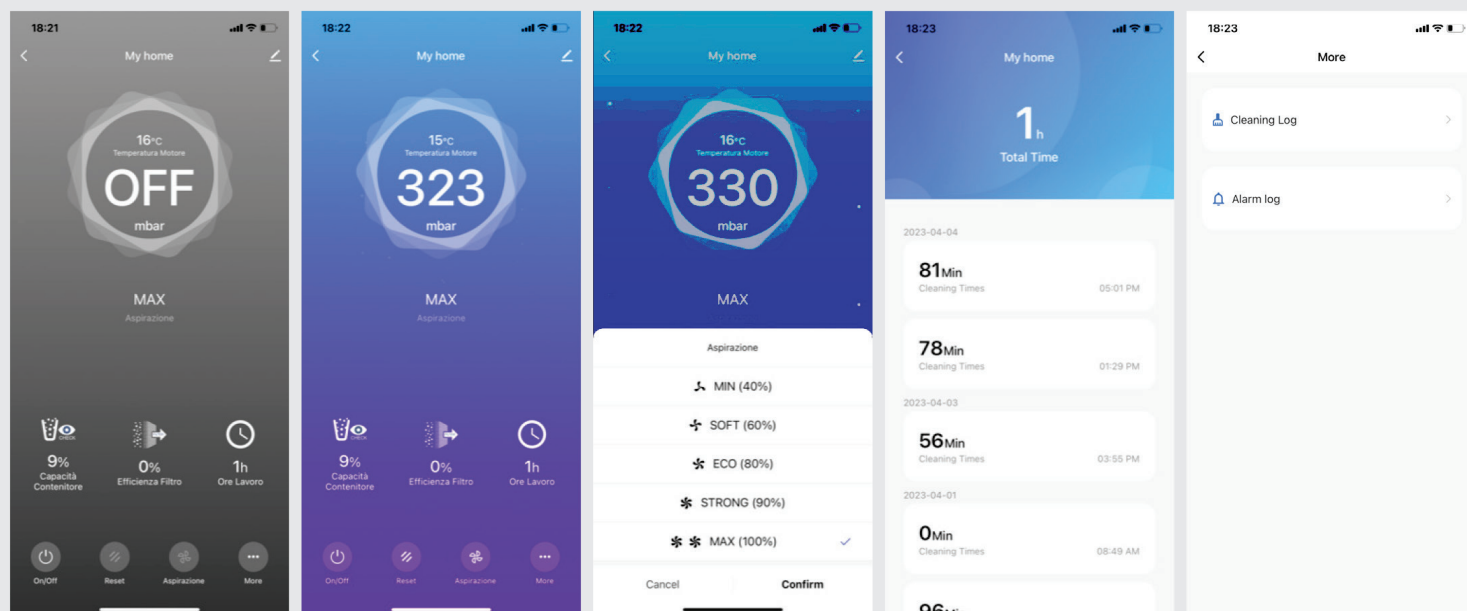

All data is visible in real time, whether the Dynamica is On or in Standby.



Aertecnica Device

Vacuum power control.

You can adjust the vacuum power according to the application or the surface you are cleaning

Cleaning history

You can check when the central power unit was used and for how long.

Alarms and Anomaly register

reporting alarms and anomalies in chronological order.



SOUNDPROOFED ENGINE ROOM



ELECTRONIC TEMPERATURE SENSOR WITH DYNAMIC ADJUSTMENT

TECHNICAL FEATURES		23 / 23 PRO	34 / 34 PRO
Power supply	Volt (Vac)	220-240	220-240
Motor power	Watts (W)	1350	1590
Frequency	HZ	50-60	50-60
Electrical protection degree	IP	IP31	IP31
Turbine motor		3 stages By-pass	3 stages By-pass
Air flow	m ³ /h	168	174
Maximum vacuum	mbar	374	415
Filter cartridge surface	cm ²	8.200	12.300
APF System		TD23 - NO	TD34 - NO
		TD23A PRO - YES	TD34A PRO - YES
Dust Container capacity	litres	23	23
Multi-layer collector bag microfiber (optional)	litres	20-30	20-30
Nylon dust bag (optional)	litres	23	23
Vacuuming service socket		yes	yes
Ø 50 Dust inlet		dx-sx	dx-sx
Ø 50 Air expulsion		up	up
Machine body	material/finish	High resistance powder painting	
Dust container	material	Polypropylene	Polypropylene
WI-FI 2.4 ghz (Aertecnica Device App)		yes	yes
Activation / deactivation with voice commands		yes	yes
Power control		yes	yes
Noise level	db	64	64,5
Recommended surface up to	square meter	300	500
Ø 50 Silencer		si	si
Height	cm	104	114
Diameter	cm	34	34
Weight	kg	14	15,2

8001744